


RATCHET LEVER HOIST

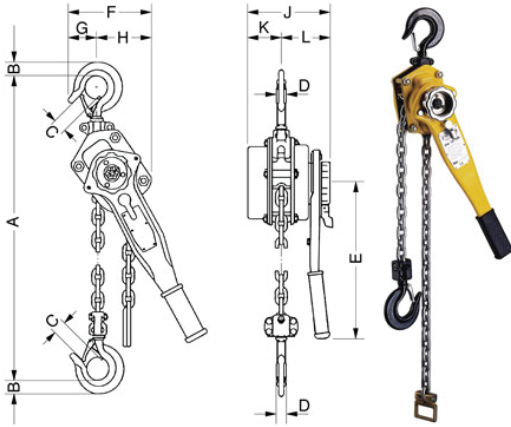

Ratchet lever hoist

Capacity 750-6,000kg
Features:

- Forged suspension and load hook from non-aging, high alloy tempering steel, yield under overload instead of breaking
- Chain guide is integrated into the housing to eliminate fouling and jamming of the chain on the load sheave.
- Robust chain stop
- Handlever with rubber grip
- Hard Chromium plated hand wheel
- Sturdy bottom block with encapsulated bolt connections.

Technical data

| Model | Capacity (kg) | No. of Chain falls | Chain dimension d x p (mm) | Lift with one full lever turn (mm) | Handle pull at WLL (daN) | N.W. (kg) | Price / ราคา |
|----------|---------------|--------------------|----------------------------|------------------------------------|--------------------------|-----------|--------------|
| Uno 750 | 750 | 1 | 6 x 18 | 20 | 14 | 7 | โปรดสอบถาม |
| Uno 1500 | 1500 | 1 | 8 x 24 | 22 | 22 | 11 | โปรดสอบถาม |
| Uno 3000 | 3000 | 1 | 10 x 30 | 17 | 34 | 21 | โปรดสอบถาม |
| Uno 6000 | 6000 | 2 | 10 x 30 | 9 | 35 | 30 | โปรดสอบถาม |

Dimensions

| Model | Uno 750 | Uno 1500 | Uno 3000 | Uno 6000 |
|------------|---------|----------|----------|----------|
| A min (mm) | 295 | 380 | 420 | 570 |
| B (mm) | 21 | 29 | 37 | 54 |
| C (mm) | 24 | 32 | 35 | 44 |
| D (mm) | 13 | 20 | 24 | 43 |
| E (mm) | 235 | 350 | 350 | 350 |
| F (mm) | 111 | 140 | 174 | 239 |
| G (mm) | 33 | 49 | 60 | 77 |
| H (mm) | 78 | 91 | 114 | 162 |
| J (mm) | 142 | 166 | 184 | 184 |
| K (mm) | 55 | 66 | 79 | 79 |
| L (mm) | 87 | 100 | 105 | 105 |

Trade Master / Taiwan


CABLE RATCHET PULLING SET (รอกดึงสาย)



| Model | Capacity | Wire rope | Rope L. | Lever L. | Wire Grip | WT. | Price / ราคา |
|-------|----------|-----------|---------|----------|------------|--------|--------------|
| 1040 | 1 ton | 5 mm | 2200 mm | 330 mm | 2 ton grip | 4.3 kg | 9,200.00 |
| 1506 | 1.5 ton | 6 mm | 2200 mm | 340 mm | 2 ton grip | 5.6 kg | 11,000.00 |
| 2000 | 2 ton | 5 mm | 2200 mm | 430 mm | Snap hook | 4.2 kg | 12,500.00 |

Trade Master

CABLE PULLING GRIPS (ตาข่ายลากสาย)

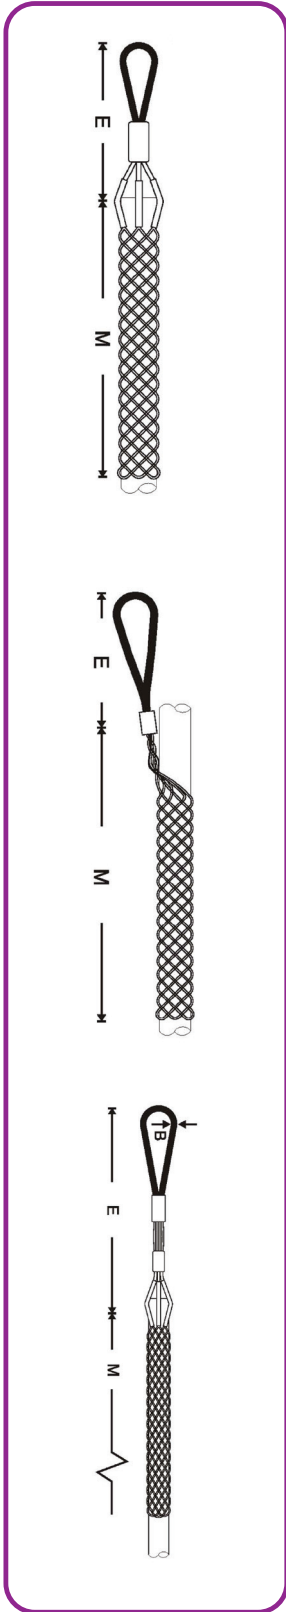

PULLING GRIPS

- For medium load cable
- Double weave, Rotating eye

| Model No. | Cable Dia | Breaking load | E | M | Price / ราคา |
|-----------|-----------|---------------|--------|--------|--------------|
| TG-050-24 | 10-15 mm | 2040 kg | 200 mm | 300 mm | 1,100.00 |
| TG-062-24 | 15-18 mm | 2540 kg | 200 mm | 500 mm | 1,400.00 |
| TG-075-24 | 18-25 mm | 3080 kg | 230 mm | 550 mm | 1,800.00 |
| TG-100-24 | 25-37 mm | 4350 kg | 230 mm | 600 mm | 2,150.00 |
| TG-150-24 | 37-50 mm | 7440 kg | 280 mm | 650 mm | 2,700.00 |
| TG-200-24 | 50-63 mm | 8390 kg | 300 mm | 700 mm | 3,000.00 |
| TG-250-24 | 63-75 mm | 11110 kg | 300 mm | 750 mm | 4,200.00 |
| TG-300-24 | 75-88 mm | 11110 kg | 350 mm | 800 mm | 4,800.00 |
| TG-350-24 | 89-102 mm | 14060 kg | 350 mm | 800 mm | 5,400.00 |

SLACK GRIPS

- Split mesh lace closing
- Double weave, Offset flexible eye

| Model No. | Cable Dia | Breaking load | E | M | Price / ราคา |
|------------|-----------|---------------|--------|--------|--------------|
| SG - 075 A | 18-25 mm | 1130 kg | 127 mm | 279 mm | 2,100.00 |
| SG - 100 A | 25-32 mm | 1590 kg | 127 mm | 279 mm | 2,450.00 |
| SG - 125 A | 32-37 mm | 1810 kg | 152 mm | 406 mm | 2,800.00 |
| SG - 150 A | 37-50 mm | 1810 kg | 229 mm | 432 mm | 3,200.00 |
| SG - 200 A | 50-63 mm | 1810 kg | 254 mm | 483 mm | 4,000.00 |
| SG - 250 A | 63-75 mm | 1810 kg | 305 mm | 508 mm | 4,200.00 |
| SG - 300 A | 75-88 mm | 1810 kg | 305 mm | 533 mm | 4,500.00 |
| SG - 350 A | 88-102 mm | 1810 kg | 305 mm | 599 mm | 4,800.00 |

Pulling Grip

- High strength of cable and overhead transmission line construction
- A.C.S.R, A.C.A.R, Cu&Al conductor and ground wires
- Triple Weave Galvanized Wire, Single eye

| Model No. | Cable Dia | Breaking load | E | M | | Price / ราคา |
|-----------|--------------|---------------|--------|--------|--------|--------------|
| D-10 | 4.84-9.40 mm | 2948 kg | 250 mm | 250 mm | 6.4 mm | 3,000.00 |
| D-16 | 9.60-16.0 mm | 6350 kg | 300 mm | 300 mm | 10 mm | 3,500.00 |
| D-22 | 16.0-22.1 mm | 9072 kg | 325 mm | 325 mm | 10 mm | 4,600.00 |
| D-28 | 22.4-28.4 mm | 13880 kg | 375 mm | 375 mm | 13 mm | 6,500.00 |
| D-35 | 29.0-32.9 mm | 21228 kg | 450 mm | 450 mm | 16 mm | 8,500.00 |
| D-48 | 35.0-48.3 mm | 30146 kg | 600 mm | 600 mm | 20 mm | 9,900.00 |

BRYANT

ECONOMY CABLE GRIP / USA



PULLING - HEAVY - DUTY MULTIPLE STRENGTH FLEXIBLE EYE Features - Specification

- : Triples weave for greater gripping power: High strength galvanized steel
- : Endless weave will not snag lies flat on cable
- : Longer-wearing, reinforced tubular shoulder protect cable ends

Pulling Grips Type FE

| Model No. | Cable Range O.D.(Inch) | Breaking in lbs. | E inch | M inch | Price / ราคา |
|-----------|------------------------|------------------|--------|--------|--------------|
| MST025FE | 1/4 - 3/8 | 6800 | 9 | 26 | 6,000.00 |
| MST050FE | 1/2 - 5/8 | 10000 | 9 | 32 | 7,200.00 |
| MST075FE | 3/4-1 | 10100 | 11 | 41 | 9,500.00 |
| MST100FE | 1-1 1/4 | 21000 | 12 | 52 | 11,100.00 |
| MST125FE | 1 1/4- 1 3/4 | 21000 | 12 | 56 | 12,500.00 |
| MST150FE | 1 1/2- 1 3/4 | 22500 | 18 | 60 | โปรดสอบถาม |
| MST175FE | 1 3/4 - 2 | 22500 | 18 | 70 | โปรดสอบถาม |



PULLING - SPLICING FLEXIBLE TUBES WIRE WOVEN Features - Specification

- : Double weave mesh construction : High - strength galvanized steel
- : Easy installation and removal : Reusable

Pulling - Splicing Type FTD

| Model No. | Cable Range O.D. | | Breaking in lbs. | Mesh length (L) | | Price / ราคา |
|-----------|------------------|-----------|------------------|-----------------|--------|--------------|
| | inch | mm. | | inch | mm. | |
| FTD03718 | .37-.49 | 9.4-12.4 | 3500 | 18 | 457.2 | 4,200.00 |
| FTD05024 | .50-.61 | 12.7-15.5 | 3500 | 24 | 609.6 | 4,800.00 |
| FTD06236 | .62-.64 | 15.7-18.8 | 4400 | 36 | 914.4 | 5,800.00 |
| FTD07548 | .75-.99 | 19-25.1 | 7500 | 48 | 1219.2 | 6,600.00 |
| FTD10048 | 1-1.49 | 25.4-37.8 | 10000 | 48 | 1219.2 | 9,000.00 |
| FTD15048 | 1.5-1.99 | 38.1-50.5 | 16000 | 48 | 1219.2 | โปรดสอบถาม |

SUPPORT GRIPS / ตาข่ายทิวสาย

Type U (Single eye)
ตาข่ายทิวสายชนิดหูเดียว

| Cable Range O.D. | | Breaking in lbs. | E inch | M inch | Price / ราคา |
|------------------|-------|---------------------|-----------|-----------|--------------|
| Min. | Max. | | | | |
| 1/2 | 5/8 | 530 | 4 | 10 | 1,200.00 |
| 5/8 | 3/4 | 1020 | 4 | 13 | 1,500.00 |
| 1 | 1 1/4 | 1610 | 5 | 14 | 1,700.00 |
| 1 1/2 | 1 3/4 | 1610 | 5 | 17 | 2,100.00 |
| 1 3/4 | 2 | 1610 | 6 | 19 | 2,600.00 |
| 2 | 2 1/2 | 3260 | 6 | 21 | 3,100.00 |
| 2 1/2 | 3 | 3260 | 6 | 23 | 3,600.00 |
| 3 | 3 1/2 | 4900 | 8 | 25 | 5,500.00 |
| 3 1/2 | 4 | 4900 | 8 | 27 | 5,900.00 |

Type DE (Double eye)
ตาข่ายทิวสายชนิดสองหู


| Cable Range O.D. | | Breaking in lbs. | E inch | M inch | Price / ราคา |
|------------------|-------|---------------------|-----------|-----------|--------------|
| Min. | Max. | | | | |
| 1/2 | 5/8 | 530 | 4 | 10 | 1,200.00 |
| 5/8 | 3/4 | 1020 | 4 | 13 | 1,500.00 |
| 1 | 1 1/4 | 1610 | 5 | 14 | 1,700.00 |
| 1 1/2 | 1 3/4 | 1610 | 5 | 17 | 2,100.00 |
| 1 3/4 | 2 | 1610 | 6 | 19 | 2,600.00 |
| 2 | 2 1/2 | 3260 | 6 | 21 | 3,100.00 |
| 2 1/2 | 3 | 3260 | 6 | 23 | 3,600.00 |
| 3 | 3 1/2 | 4900 | 8 | 25 | 5,500.00 |
| 3 1/2 | 4 | 4900 | 8 | 27 | 5,900.00 |

Type U (Single eye)
ตาข่ายทิวสายชนิดผ่าข้างหูเดียว

| Cable Range O.D. | | Breaking in lbs. | E inch | M inch | Price / ราคา |
|------------------|-------|---------------------|-----------|-----------|--------------|
| Min. | Max. | | | | |
| 5/8 | 3/4 | 1020 | 4 | 13 | 1,800.00 |
| 1 | 1 1/4 | 1610 | 5 | 14 | 2,000.00 |
| 1 1/2 | 1 3/4 | 1610 | 5 | 17 | 2,400.00 |
| 1 3/4 | 2 | 1610 | 6 | 19 | 2,700.00 |
| 2 | 2 1/2 | 3260 | 6 | 21 | 3,100.00 |
| 2 1/2 | 3 | 3260 | 6 | 23 | 3,800.00 |
| 3 | 3 1/2 | 4900 | 8 | 25 | 5,800.00 |
| 3 1/2 | 4 | 4900 | 8 | 27 | 6,200.00 |

Type DE (Double eye)
ตาข่ายทิวสายชนิดผ่าข้างสองหู

| Cable Range O.D. | | Breaking in lbs. | E inch | M inch | Price / ราคา |
|------------------|-------|---------------------|-----------|-----------|--------------|
| Min. | Max. | | | | |
| 5/8 | 3/4 | 1020 | 4 | 13 | 1,800.00 |
| 1 | 1 1/4 | 1610 | 5 | 14 | 2,000.00 |
| 1 1/2 | 1 3/4 | 1610 | 5 | 17 | 2,400.00 |
| 1 3/4 | 2 | 1610 | 6 | 19 | 2,700.00 |
| 2 | 2 1/2 | 3260 | 6 | 21 | 3,100.00 |
| 2 1/2 | 3 | 3260 | 6 | 23 | 3,800.00 |
| 3 | 3 1/2 | 4900 | 8 | 25 | 5,800.00 |
| 3 1/2 | 4 | 4900 | 8 | 27 | 6,200.00 |

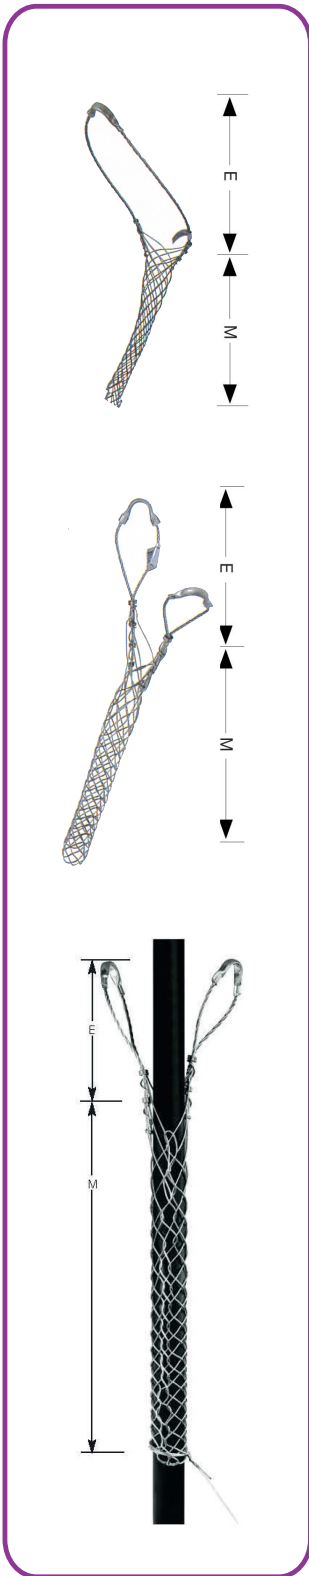

WIRE GRIP (แคลมป์ดึงสาย)



PULLING SWIVEL

GRIPS FOR BARE ACSR, AAC AND STRANDED COPPER CABLE

1 TON WIRE GRIP FOR COPPER BARE & STEEL MESSENGER WIRE

2 TON WIRE GRIP FOR COVERED CONDUCTOR

3 TON WIRE GRIP FOR COVERED CONDUCTOR

EYE HOOK

Trade Master

Wire Grips (แคลมป์ดึงสาย)

- * Prevent winding and tangling during pull
- * Must not pass through bull wheel on puller
- * Select the swivel with a suitable working load
- * safety factor of 3:1 for horizontal pull only

Light Duty swivel

พูลลิงสไวเวล

| Model | Breaking load | A | B | C | Weight | Price / ราคา |
|----------|---------------|--------|-------|-------|---------|--------------|
| HGS-3000 | 3 ton | 90 mm | 24 mm | 12 mm | 0.35 Kg | 3,200.00 |
| HGS-3500 | 4.5 ton | 105 mm | 36 mm | 20 mm | 0.47 Kg | 3,750.00 |
| HGS-5000 | 7.2 ton | 140 mm | 30 mm | 13 mm | 0.60 Kg | 4,300.00 |
| HGS-8000 | 12 ton | 150 mm | 38 mm | 16 mm | 1 Kg | 4,725.00 |

Wire Grips

- * for Bare A.C.S.R., Aluminum cable and stranded-copper cable
- * Max.coverage of cables will minimized damage of conductors

| Model | Safe load | Min Cable Dia. | Max Cable Dia. | Jaw L. | Weight | Price / ราคา |
|---------|-----------|----------------|----------------|--------|---------|--------------|
| 1656-20 | 2 ton | 5.08 mm | 10.16 mm | 105 mm | 1.36 kg | 4,725.00 |
| 1656-30 | 2 ton | 7.87 mm | 13.46 mm | 121 mm | 1.70 kg | 5,060.00 |
| 1656-40 | 3.6 ton | 13.48 mm | 18.80 mm | 140 mm | 3.4 kg | 5,850.00 |
| 1656-50 | 3.6 ton | 18.04 mm | 21.83 mm | 140 mm | 3.4 kg | 6,750.00 |
| 1656-60 | 3.6 ton | 21.83 mm | 24.60 mm | 140 mm | 3.4 kg | โปรดสอบถาม |
| 1656-70 | 3.6 ton | 24.36 mm | 25.91 mm | 140 mm | 3.4 kg | โปรดสอบถาม |

SD-GRIP

Model SD-1000C * For copper cable,covered conductor,steel rod,copper cable and messenger wire

| Safe load | Min Cable Dia. | Max Cable Dia. | Weight | Price / ราคา |
|-----------|----------------|----------------|--------|--------------|
| 1 ton | 2.6 mm | 15 mm | 0.6 kg | 3,150.00 |

2 Ton Grip

Model S-2000C * For bare copper,messenger wire and covered conductor

| Safe load | Min Cable Dia. | Max Cable Dia. | Weight | Price / ราคา |
|-----------|----------------|----------------|--------|--------------|
| 2 ton | 4 mm | 22 mm | 1.2 kg | 4,600.00 |

3 Ton L-Grip

Model S-3000CL * For copper cable,covered conductor and messenger wire


| Safe load | Min Cable Dia. | Max Cable Dia. | Weight | Price / ราคา |
|-----------|----------------|----------------|--------|--------------|
| 3 ton | 16 mm | 32 mm | 2.8 kg | 9,000.00 |

Eye Hook

ตะขอเกี่ยวพร้อมแคปสี่ก

| Model | H-1500TH with cap | | Weight (kg) | Price / ราคา |
|----------------|-------------------|---------|-------------|--------------|
| Safe load (kg) | Eye mm. | Jaw mm. | | |
| 1,500 | 16 | 21 | 0.25 | 600.00 |

**WIRE GRIP (แคลมป์ดิ่งสาย)
CABLE CUTTER & CABLE STRIPPER
(คีมตัดสายเคเบิล & เครื่องลอกสายเคเบิล)**



KLEIN
Grips for Large Diameter Conductors

| Model | Conductor sq.mm. | | Price |
|---------|------------------|---------|-----------|
| | ACSR | AAC | ราคา |
| 1628-30 | 240-400 | 300-500 | 35,000.00 |
| 1628-40 | 500-625 | 625-800 | 38,000.00 |



KLEIN
Grips for PVC Covered Conductors

| Model | Conductor sq.mm. | Price |
|---------|------------------|----------|
| | | ราคา |
| 1659-20 | 10-25 | 4,800.00 |
| 1659-30 | 16-50 | 5,200.00 |
| 1659-40 | 70-120 | 6,500.00 |
| 1659-50 | 150-240 | 8,000.00 |



H.K Porter

Ratchet type, Hard Cable Cutter
for AAC, ACSR, Copper cable, Telephone cable, Steel Stranded wire

| Type | Cutting Capacity Max.Dia.mm. | Length mm. | Price |
|---------|---------------------------------|---------------|-----------|
| | | | ราคา |
| 8690 FH | 30 | 743 | 32,000.00 |

H.K.P. CABLE CUTTER



**Shearing type cable cutter for AAC
Copper Conductors**

| Model | Max.Conductor Size sq.mm. | Body Length mm. | Price |
|--------|------------------------------|--------------------|----------|
| | | | ราคา |
| L -325 | 325 | 600 | 6,400.00 |
| DC-700 | 500 | 800 | 9,600.00 |

CABLE CUTTER



Cable Preparation Tool Adjustable URD End Stripper
เครื่องลอกฉนวน

| Type | Cable Range O.D. inch | Price / ราคา |
|-------|--------------------------|--------------|
| WS-50 | 1/2 - 2 1/2 | 25,000.00 |
| CB-50 | Spare Blade | 3,600.00 |



Semi-Con Preparation Tool Adjustable URD Cable Shield
เครื่องลอก Semi-Con

| Type | Cable Range O.D. mm | Price / ราคา |
|-----------|------------------------|--------------|
| EXRM-0946 | -40 | 75,000.00 |